



## BASKET STRAINERS

AJ VALVELINE. S.L.



## BASKET STRAINERS

### BOLTED COVER

DN 50 - 200 PN10, PN16 & ANSI 150

Carbon Steel

**Fig. BS310, BS316 & BS315**

Stainless Steel

**Fig. BS410, BS416 & BS415**



AJ VALVELINE. S.L.  
e-mail: [ajvalveline@ajvalveline.com](mailto:ajvalveline@ajvalveline.com)  
[www.ajvalveline.com](http://www.ajvalveline.com)




# BASKET STRAINERS

AJ VALVELINE. S.L.

## General Dimensions

### Bolted Cover

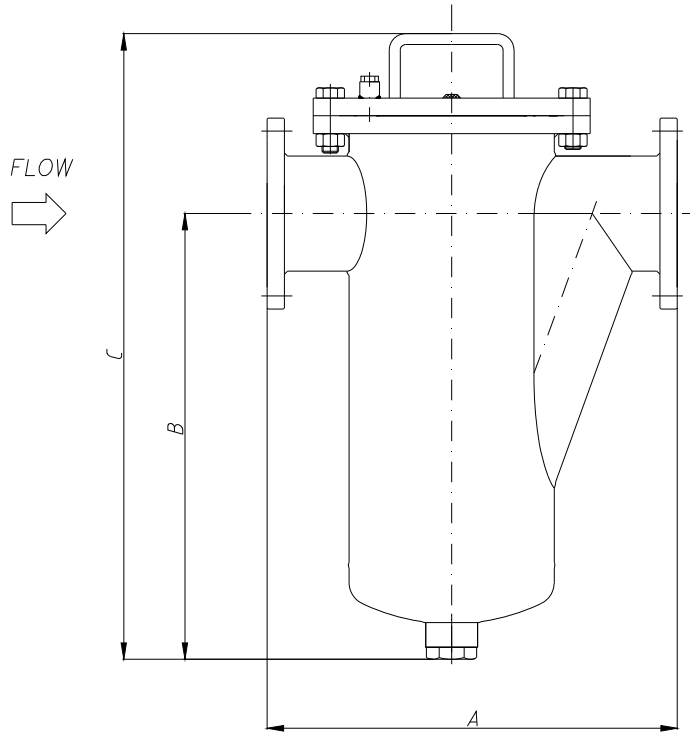

Dimensions in mm

DN	A	B	C	Drain	Vent	Rel. Areas
50	300	340	545	1"	----	1:5.49
65	350	370	600	1"	----	1:4.33
80	375	409	671	1"	----	1:3.73
100	440	457	715	1"	----	1:3.31
125	525	580	785	1 1/2"	1/2"	1:2.61
150	600	670	915	1 1/2"	1/2"	1:2.83
200	800	810	1065	1 1/2"	1/2"	1:2.75
250	900	870	1225	2"	3/4"	1:2.67
300	950	930	1335	2"	3/4"	1:2.63
350	1050	1150	1575	2"	1"	1:2.60
400	1150	1180	1650	2"	1"	1:2.28

Standard screen:  
Perforation: 1.5 mm  
Thickness: 0.5 mm

AJ VALVELINE. S.L.  
e-mail: [ajvalveline@ajvalveline.com](mailto:ajvalveline@ajvalveline.com)  
[www.ajvalveline.com](http://www.ajvalveline.com)